

With Torque Reducing Wings

Blue Ox Features & Benefits:

- Self Drilling, Fast & Easy to Install - no pilot pre-drilling required, saves time and money
- Hex Head ensures secure non-slip engagement - user friendly and simple to insert
- Built-in washer guards against overdriving - assures proper setting depth
- Chamfered underhead allows countersinking - eliminates added steps with lag screws
- Unique wing design reduces drilling torque and allows natural log settlement (lengths 8"-16") - reduces equipment costs, eliminates installation failures
- Heat treated steel provides maximum pull down, shear & tensile strengths - heat treating improves structural properties and part reliability
- Exclusive Blue E-Coat corrosion resistant coating outperforms other finishes - exceeds Factory Mutual Corrosion-Resistance Standard 4470
- 2.375" thread length - enables optimal pullout resistance
- Packaged in durable plastic pails - protects parts from weather, can be stored on site, and comes with easy carrying handles
- Trusted engineering data based on ICC Evaluation Service ESR 1876 - assures maximum performance based upon independent evaluation
- Free magnetic driver bit with every pail - no additional expenses, installation begins immediately, magnetic bit secures fastener insertion for higher efficiency
- Oversized thread provides increased strip-out resistance and high pull-out strength so that logs stay securely locked together
- Gimlet point for fast thread engagement - saves time and fatigue-free

Head Type: 5/16" Hex **Thread Length:** 2 3/8"
Thread Diameter: .260" **T.P.I:** 7.5
Shank Diameter: .189" **Point Type:** Gimlet

For complete engineering data, see ICC-ESR1876@www.icc-es.org

Length	Part Number	Carton Wt. (lbs)	Carton Qty.	Skid Qty.
4"	B6430-932	10	250	25,000
6"	B6450-932	12	250	25,000
8"	B6470-932	17	250	25,000
10"	B6490-932	23	250	13,000
12"	B6510-932	28	250	13,000
14"	B6530-932	34	250	13,000
16"	B6550-932	39	250	6,000


Installation Instructions: Use 1/2" high torque, low speed drill (0-1000 RPM) with 5/16" hex driver. Allow for minimum 2.5" penetration into the bottom log with 1/4" countersink depth. Always consult your engineer for proper placement procedures.



10300 E. 107th Place • Brighton, CO 80601
 1-800-767-5656 • www.sashco.com



With Torque Reducing Wings

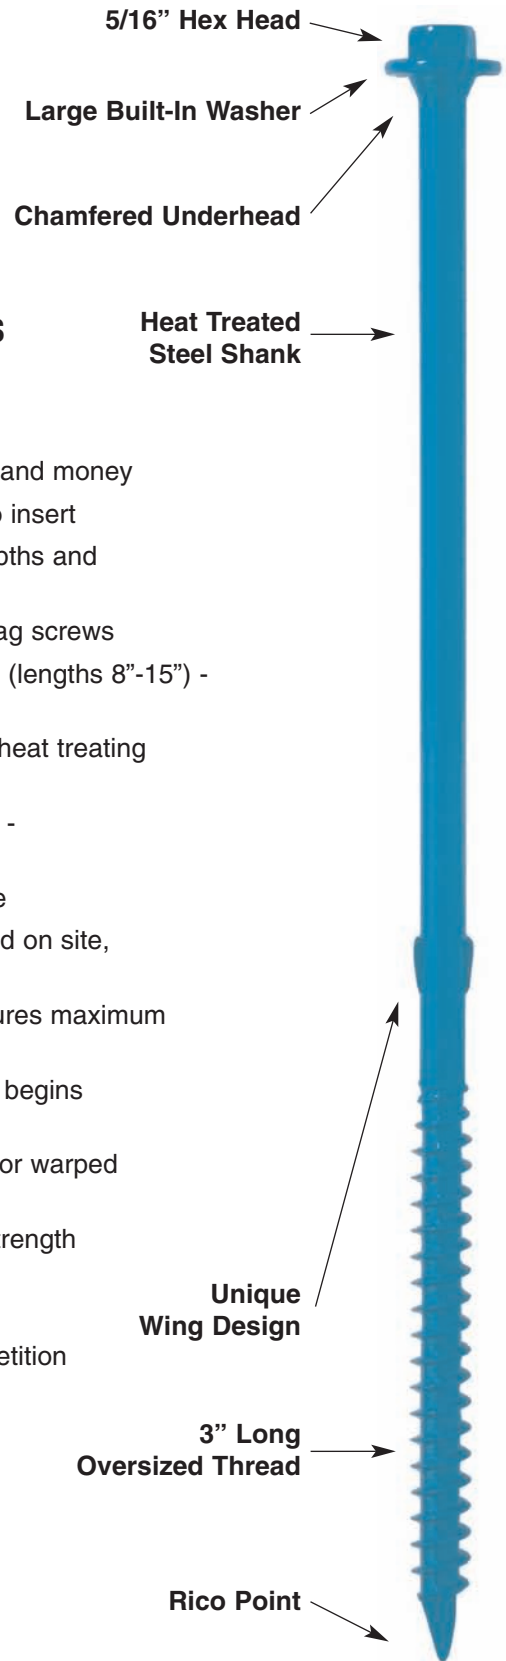

Blue Max Features & Benefits:

- Self Drilling, Fast & Easy to install - no pilot pre-drilling required, saves time and money
- Hex Head ensures secure non-slip engagement - user friendly and simple to insert
- Large built-in washer guards against overdriving - assures proper setting depths and provides added pulldown strength for warped logs
- Chamfered underhead allows countersinking - eliminates added steps with lag screws
- Unique wing design reduces drilling torque and allows natural log settlement (lengths 8"-15") - reduces equipment costs, eliminates installation failures
- Heat treated steel provides maximum pull down, shear & tensile strengths - heat treating improves structural properties and part reliability
- Exclusive Blue E-Coat corrosion resistant coating outperforms other finishes - exceeds Factory Mutual Corrosion-Resistance Standard 4470.
- Waxed parts speed installation, reduces drilling torque, and improves drill life
- Packaged in durable plastic pails - protects parts from weather, can be stored on site, and comes with easy carrying handle
- Trusted engineering data based on ICC Evaluation Service ESR 1876 - assures maximum performance based upon independent evaluation
- Free magnetic driver bit with every pail - no additional expenses, installation begins immediately, magnetic bit secures fastener insertion for higher efficiency
- Free heavy duty washer with every pail - greatly enhances pulldown power for warped and twisted logs
- Oversized thread provides increased strip-out resistance and high pull-out strength so that logs stay securely locked together
- Rico point for light gauge steel penetration (if applicable)
- 3" thread length - maximum pullout resistance when compared to the competition

Head Type: 5/16" Hex **Thread Length:** 3"
Thread Diameter: .317" **T.P.I.:** 7.5
Shank Diameter: .230" **Point Type:** Rico

For complete engineering data, see ICC-ESR1876@www.icc-es.org

Length	Part Number	Carton Wt. (lbs)	Carton Qty.	Skid Qty.
6"	B6648-932F	20	250	15,000
8"	B6664-932F	26	250	15,000
9"	B6672-932F	29	250	13,000
10"	B6680-932F	32	250	13,000
11"	B6688-932F	35	250	13,000
12"	B6696-932F	38	250	13,000
14"	B6712-932F	44	250	13,000
15"	B6720-932F	47	250	6,000

Installation Instructions: Use 1/2" high torque, low speed drill (0-1000 RPM) with 5/16" hex driver. Allow for minimum 3" penetration into the bottom log with 1/4" countersink depth. Always consult your engineer for proper placement procedures.

